


SM-MM Broadband Converter

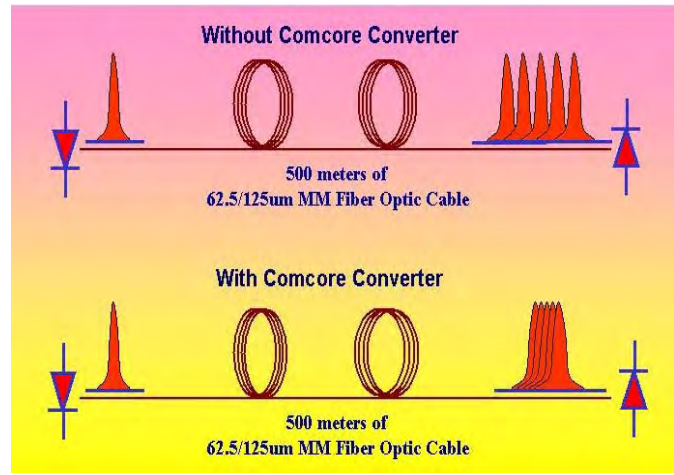

Features

- Centralized Cladding Splicing
- Permanent Splice
- Low Splicing Loss
- Automatically- Spliced

Benefits

- Easy to Use
- Install Any Connectors
- Avoid Differential Mode Delay (DMD)
- Fits Existing Cabling Scheme

Specifications

Parameters	Unit	Premium Grade	A Grade
Bandwidth	nm	All Wavelength	
Insertion Loss	Max	0.5	1.0
Return Loss	Min	35	30

Ordering Information

S	M	M	M	O	O							
						Pigtail	Package	Pigtail	Input Fiber	Output Fiber	Input	Output
						S=259um M=0.9m m L=3mm Cable	A=S11 D=M1	Length 0=0.5 m 1=1.0 m 2=1.5 m 3=2.0 m	Type 1=SMF28	Type 2=50/125 3=62.5/125	Connector 0=None 1=FC/PC 2=FC/SPC 3=FC/APC 4=SC/SPC 5=SC/APC 6=ST 7=FC/UPC 8=SC/UPC 9=MU A=LC B=SC/PC	Connector 0=None 1=FC/PC 2=FC/SPC 3=FC/APC 4=SC/SPC 5=SC/APC 6=ST 7=FC/UPC 8=SC/UPC 9=MU A=LC B=SC/PC