


High Power 1x2(2x2) Single Mode Broadband Splitter

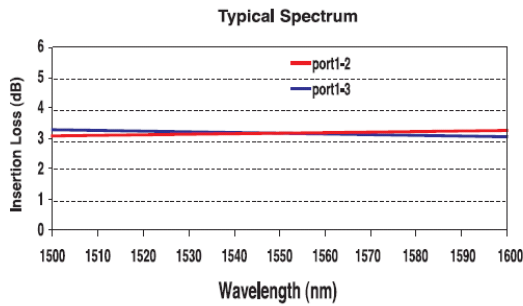

Product Features

- Low PDL
- Low Insertion Loss
- High Power Endured
- Stable and Reliable

Product Applications

- Optical Communication System
- Optical Testing System
- Optical Fiber Sensor
- Optical Power Distributor

Specifications			Splitting Ratio: 50:50	
Port Configuration			1x2 or 2x2	
Bandwidth		nm	±40	
Insertion Loss	Max.	dB	3.4	
Excess Loss	Typ.	dB	0.05	
Uniformity	Max.	dB	0.6	
PDL	Max.	dB	0.1	
Return Loss*	Min.	dB	50	
Operating power	Min.	W	5	
	Max.	W	10	
Operating Temperature		°C	-40 to +85	
Storage Temperature		°C	-50 to +85	
Package Type	mm	S11	Ø4x60: for bare fiber	
		S12	Ø4x70: for 0.9mm loose tube	
		M1	9x16x90: for 0.9mm loose tube or 2mm cable or 3mm cable	

* >60dB on request for 1x2 structure.

Test at central wavelength only.

Splitting Ratio & Insertion Loss Conversion Table

Splitting Ratio	Maximum Insertion Loss (dB)			
	Premium		A grade	
	Output Port 1	Output Port 2	Output Port 1	Output Port 2
50:50	3.4	3.4	3.6	3.6
60:40	2.5	4.4	2.8	4.8
70:30	1.8	5.6	2.0	6.1
80:20	1.1	7.4	1.3	8.0
90:10	0.6	10.8	0.8	12.0
95:5	0.4	14.6	0.5	18.4
96:4	0.3	16.0	0.4	19.0
97:3	0.3	17.5	0.4	19.5
98:2	0.2	19.0	0.3	20.0
99:1	0.2	21.5	0.3	22.0
99.5:0.5	0.2	23.0	0.3	24.0

Ordering Information

H	P	B	S							
Wavelength	Structure	Splitting Ratio	Package	Fiber Type	Pigtail	Fiber Length	Connector			
1=1625nm 2=1590nm 3=1570nm 4=1550nm 5=1480nm 6=1475nm 7=1310nm P=2000nm S=Specify	1=1x2 2=2x2	05=99.5:0.5 99=99:1 98=98:2 97=97:3 96=96:4 95=95:5 ... 50=50:50	A=S11 B=S12 D=M1	1=SMF-28e	S=250um bare fiber M=0.9mm loose tube L=3mm cable R=2mm cable	0=0.5m 1=0.75m 2=1.0m S=Specify	0=None 1=FC/PC 2=FC/SPC 3=FC/APC 4=SC/SPC 5=SC/APC 6=ST 7=FC/UPC 8=SC/UPC 9=MU A=L/C/PC B=SC/PC C=L/C/UPC D=L/C/APC			

Note: 1. Central Wavelength can be customized for different applications.
2. All specifications are before connectors and are subject to change without notice.